

IB04/051701

Kongeriget Danmark

Patent application No.: PA 2003 01483

Date of filing: 08 October 2003

Applicant: Brødrene Hartmann A/S
(Name and address) Klampenborgvej 203
DK-2800 Lyngby
Denmark

Title: Låseanordning til emballage

IPC: B 65 D 85/32; B 65 D 43/22

This is to certify that the attached documents are exact copies of the above mentioned patent application as originally filed.



Patent- og Varemærkestyrelsen
Økonomi- og Erhvervsministeriet

13 September 2004

Susanne Morsing
Susanne Morsing

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)


PATENT- OG VAREMÆRKESTYRELSEN

BEST AVAILABLE COPY

Modtaget
- 8 OKT. 2003
PVS

RETAINMENT MEANS FOR PACKAGE

TECHNICAL FIELD

5

The present invention relates to packages of the kind set forth in the preamble of claim 1 and more particularly to retainment means for preventing unintentional opening of a cover part of such packages.

10

BACKGROUND OF THE INVENTION

Packages of the above kind, i.e. packages formed by suction moulding of a fibrous material for receiving one or more frangible products to be packed, for instance eggs, are well-known within the art. Among these a large number of different packages specifically for eggs has been described. Such packages generally comprise a bottom part provided with a pattern of pocket-like compartments for accommodating the eggs and a cover part, which is often hingedly connected to the bottom part so that it can be swung between a closed and an open position. Most such packages are furthermore provided with retainment means for releasably retaining the cover part in its closed position on the bottom part and a large number of different retainment means for this purpose has been described.

Such retainment means are for instance disclosed in US 4,782,995 and US 5,860,528 and common for these means - and corresponding retainment means known from many other packages of the present kind - is the provision of dedicated retainment members on either cover part, bottom part or on both parts.

A comparatively simple type of retainment means is described in EP 1 098 826 B1, said means comprising openings in the vicinity of the edge region of the front face of the cover part provided for releasable retainment with corresponding outwardly extending projecting members located on the bottom part. When the cover part closes on the bottom part, these outwardly projecting members enter into retaining engagement with a part of the periphery of said holes and by afterwards pulling outwards and upwards in said edge region of the cover part it is possible to

disengage the projecting members from the holes, whereby it becomes possible to open the package.

5 The above packages suffer from different disadvantages. Thus, generally dedicated retainment means on both the cover part and the bottom part are required and at least in connection with the above-mentioned package disclosed in EP 1 098 826 B1 the retainment obtained is not always sufficiently reliable, partly due to the fact that the retainment openings in the cover part are placed in the vicinity of the edge region of the cover part, where the material does not always have the needed
10 rigidity to ensure a reliable retainment of the cover part to the bottom part.

DISCLOSURE OF THE INVENTION

15 On the above background it is an object of the present invention to provide improved retainment of the cover part of a package to the bottom part hereof, the cover part and the bottom part of the package being hingedly connected to each other along an upper rim portion of the bottom part and a lower edge portion of the cover part.

20 Thus according to one aspect of the present invention there is provided a package formed by a suction moulding of a fibrous material for receiving one or more frangible products, such as eggs, comprising the following main parts:

- 25 - a bottom part comprising non-planar side surfaces so as to match at least partially the outer contours of the product(s) to be packed and provided with an upper rim portion or upper rim portions running along the upper edge region of the bottom part and extending outwards from the bottom part;
- a cover part comprising at least a top surface and a front surface which meet at an angle to form an edge;
- 30 - the bottom part being connected to the cover part by a hinge so as to allow the cover part to move between an open position and a closed position;
- the front surface of the cover part extending down from the edge and overlapping the non-planar side surface of the bottom part opposite the hinge when the cover part is in its closed position;

- said cover part being furthermore provided with at least one inwardly extending protrusion for locking engagement with said upper rim portion or portions of the bottom part when the package is in its closed state.

5 According to a preferred embodiment of the package according to the present invention said hinge joining the cover part and the bottom part is positioned at a level above said upper edge region of the bottom part. This positioning of the hinge is advantageous in that it allows the retainment protrusion(s) on the cover part to swing into its/their retaining position underneath the upper rim portion running along
10 the upper edge region of the bottom part with only a slight deformation of the material of these corresponding retainment portions during closing and opening of the package.

15 The package is preferably made of moulded pulp, although other materials of suitable resiliency could also be envisaged.

The present invention takes advantage of the presence on the bottom part of said upper rim portion or upper rim portions running along the upper edge region of the bottom part and extending outwards from the bottom part. Such flange-like upper
20 rim portions on the bottom part of packages of the kind dealt with in the present context are well known for instance from the above-mentioned documents and form a part of the bridging structure connecting the different pockets in the bottom part of egg trays, etc. According to the present invention this feature, i.e. the flange-like upper rim portion of the bottom part, can in an advantageous manner be utilised as
25 one of the complementary retainment means mentioned above, the cover part being provided with suitable complementary protrusions, which during closing of the package are brought into retaining engagement with said upper rim portion. A specific embodiment of this mechanism is described in the detailed description of the invention.

30 The above-mentioned protrusion or protrusions of the cover part can in principle be positioned on the cover part at such positions that it/they is/are brought into engagement with said upper rim portion of the bottom part anywhere along this edge portion. As the edge portion typically only extends outwardly from the corresponding
35 portion of the bottom part over a very limited distance in those regions of the bottom

part, where the edge portion runs along the pockets in the bottom part it might, however, be advantageous to place the protrusions on the cover part such that during closing of the package they are brought into engagement with the upper rim portion of the bottom part in the regions between adjacent pockets. This will become immediately apparent from the following detailed description of the invention.

Although the possibility to use the unmodified flange-like upper rim portion of the bottom part as one of the complementary retainment means has been described as an advantageous embodiment of the principles of the invention it is, however, also possible to provide one or more separate flaps or the like on the flange-like upper rim portion. This possibility could for instance be utilised if for some reason it would be desirable to provide said protrusions on the cover part at places corresponding to engagement with the flange-like upper rim portion of the bottom part at places, where this portion only extends a short distance outwards from the bottom part, as for instance along the outer surface of the pockets, as described above.

Especially compared to the package disclosed in the above-mentioned document EP 1 098 826 B1 the retainment means according to the present invention offers a simple and yet reliable solution to the problem of an occasionally unreliable retainment of the cover part to the bottom part of the package. Thus by placing the protrusions on the cover part for engagement with the flange-like upper rim portion of the bottom part, one of the complementary retainment means, i.e. the protrusions, necessarily becomes located further away from the lowermost edge region of the front surface of the cover part than in the package disclosed in EP 1 098 826 B1, i.e. in a region of the cover part with less transversal compliance (increased rigidity) than the corresponding retainment means in the cover part of the package according to EP 1 098 826 B1.

As a different - and complementary - embodiment of retainment means according to the present invention it is also possible to provide the bottom part of the package with protrusions for locking engagement with co-operating means provided on the cover part. Thus according to this embodiment of the invention there is provided a package formed by suction moulding of a fibrous material for receiving one or more frangible products to be packed, such as eggs, comprising:

- a bottom part comprising non-planar side surfaces so as to match at least partially the outer contours of the product(s) to be packed and provided with an upper rim portion;
- a cover part comprising at least a top surface and a front surface which meet at an angle to form an edge;
- the bottom part (2) being connected to the cover part by a hinge so as to allow the cover part to move between an open position and a closed position;
- the front surface extending down from the edge and overlapping the non-planar side surface of the bottom part opposite the hinge when the cover part is in its closed position;

where the bottom part adjacent said upper rim portion is provided with at least one outwardly extending protrusion for locking engagement with co-operating means provided on the cover part.

Specifically the co-operating means on the cover part of this embodiment is one or more openings in the front surface of the cover part, although other equivalent means may also be envisaged by a person skilled in the art.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described in more detail with reference to the accompanying drawings, in which

Figure 1 is a perspective view of an embodiment of a package shown in its open state and provided with mutually corresponding retainment means according to the present invention for retainment of the cover part to the bottom part of the package when the package is in the closed state;

Figure 2A is a first perspective view of a preferred embodiment of a package provided with retainment means according to the present invention;

Figure 2B is a second perspective view of the preferred embodiment of a package shown in Figure 2A and provided with retainment means according to the present invention;

5 Figure 2C is a perspective view of an embodiment of a package provided with retainment means according to the invention;

Figure 3 is a side elevational view of a package in the open state and provided with retainment means according to the present invention;

10 Figure 4 is another and more preferred package provided with retainment means according to the present invention; and

Figure 5 is a perspective view of a package provided with additional retainment flaps
15 according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

20 In the following, a detailed description of a specific embodiment of the retainment means according to the invention is given with reference to exemplifying packages comprising such means for the purpose of providing a reliable locking of the cover part of the package to the bottom part hereof, when the package is in its closed state.

25

Thus with reference to Fig.1 there is shown a package 1 for eggs comprising bottom parts 2 and cover parts 3 hingedly connected to each other by a hinge portion 5. The cover part 3 comprises a substantially planar top surface 16 and a substantially planar frontal side 4 which in the closed state of the package extends downwardly
30 substantially over the entire height of the bottom part 2, i.e. down to the bottom level as indicated by reference numeral 15 in Figures 1 and 3.

The bottom part 2 of the package shown in Figure 1 comprises a total of 12 pockets for eggs, generally designated by 12. Along the upper edge of the bottom part 2
35 there extends an upper flange-like rim portion 6 defining the upper level of the

bottom part itself. Elevated above this level, a hinge portion 5 connecting the bottom part 2 and the cover part 3 is situated.

5 The upper flange-like rim portion 6 extends a few millimetres outwardly from the egg pockets 12 and bridges the gaps 13 formed between adjacent egg pockets. These bridging portions of the upper rim portion 6 are designated 6' in the Figures and the lower surface of one or more of these bridging portions 6' can advantageously be used as one of the mutually corresponding retainment means according to the present invention in a manner to be described below.

10 The inner surface of the frontal side 4 of the cover part 3 is according to this embodiment of the invention provided with inwardly extending protrusions 7, the engagement surface 8 of which facing the top surface 16 of the cover part being substantially planar although other shapes of this surface - and of the protrusions 7
15 generally - would also be possible. When the cover part 2 is being closed the innermost part of the protrusions 7 passes over the corresponding outermost part of the upper flange-like rim portion 6, this being possible due to the resiliency of the frontal side 4, and the protrusions 7 enter the gap 13 under the corresponding bridging portion 6', whereby the engagement surface 8 of the protrusions enters into
20 retaining engagement with the lower surface of the bridging portion 6' and retain the cover part 3 to the bottom part 2. In order to open the package again, the frontal side 4 of the cover part 3 is pulled in an outward direction, whereby the engagement between the protrusions 7 and the corresponding bridging portions 6' can be released.

25 Referring to Figures 2A and 2B there is shown a preferred embodiment of a package comprising retainment means according to the invention. This package is specifically designed to accommodate two rows of five eggs and comprises a single bottom part 2 and corresponding cover part 3. The package shown in Figures 2A
30 and 2B comprises both the retaining protrusions 7 on the cover part and additionally the retainer means 10, 11 known from the initially cited European Patent No. 1 098 826. Furthermore, according to this embodiment of a package, the upper rim portion 6 of the bottom part 2 is provided with retainment flaps 25A and 25B for engagement with the corresponding protrusions 7 and the openings 10,

respectively, provided on the cover part 3. These pairs of retainment flaps 25A, 25B are shown in Figure 2B.

5 Referring to Figure 2C an embodiment of a package is shown which only comprises the retainment protrusions 7 on the cover part 3 and the corresponding flaps 25A on the upper rim portion of the bottom part. This embodiment of a package is thus not provided with the retainment means known from the initially cited European Patent No. 1 098 826.

10 Referring now to Figure 3 there is shown a side elevational view of the package shown in Figure 1. The transition between the top surface 16 and the planar frontal side 4 takes in this package place via the rounded edge portion 17 and the protrusion 7 is seen to be located approximately midway between this edge portion 17 and the distal edge portion 21 of the frontal side 4.

15 A side elevational view of an alternative package is shown in Figure 4, in which the rounded edge portion 17 of the package shown in Figure 3 has been replaced by a substantially planar edge region 20 longitudinally bounded by edge portions 18 and 19. The protrusion is in this case located in the vicinity of the edge portion 19.

20 Returning to Figure 1, the bottom part 2 and the cover part 3 are furthermore - as an option - provided with those retainment means already known from the initially cited European Patent No. 1 098 826. The prime advantage of the retainment means according to the present invention becomes apparent by a comparison between the
25 retainment means disclosed in EP 1 098 826 and those of the present invention.

The retainment means according to EP 1 098 826 comprises one or more rectangular holes 10 in the frontal side 4 and corresponding projections 11 placed on one or more of the pockets 12 of the bottom part 2. As apparent from Figures 3
30 and 4, these projections terminate downwardly in inclined portions 22 and when the cover part 3 is closed, a retaining engagement is established between these inclined portions 22 and the corresponding edge portion 23 of the hole in the frontal side 4. The projections, however, only project a few millimetres - typically approximately 3 mm - outwards from the corresponding surface of the pocket 12 and a reliable
35 retainment by these means requires that the frontal side 4 be substantially plane

and not exhibiting an outwardly arched shape relative to the bottom part 2. In practice, this requirement is not always fulfilled, and this has turned out to cause problems both during the packing process and in shops, where packages tend to open. These problems are solved by the retainment means according to the present invention.

5

Referring finally to Figure 5 there is shown an embodiment of retainment means as set forth in the invention according to which the flange-like upper edge 6 of the bottom part 2 is additionally provided with outwardly extending retainment flaps 25. Such flaps can - as described above - as one possibility be placed at the portions of the upper edge 6 corresponding to the positions of the retainment openings 10 in the cover part 3, in which case they can serve as a supplementary retainment means to the retainment means provided by the openings 10 and the corresponding projections 11 on the bottom part 2, to the effect that when the engagement between the openings 10 and the projections 11 is released, the cover part will still be prevented from completely opening due to a subsequent engagement between the openings 10 and the corresponding flaps 25. It is, however, also possible to place the retainment flaps 25 in the regions of the upper edge 6 of the bottom part 2 between the pockets 12, i.e. in the regions designated 6' in the Figures, in which case the flaps may serve as a reinforcement of the engagement between the protrusions 7 on the cover part 3 and this portion 6' of the upper edge 6 of the bottom part 2.

10

15

20

Although various embodiments of the present invention have been shown and described in the preceding parts of the detailed description, it is understood that a person skilled in the art may conceive other embodiments of the invention without departing from the scope of the invention as defined by the following claims. As an example, various combinations of the retainment means described above may be utilised and appropriate numbers of corresponding retainment means and their placement on the cover part and the bottom part may be varied according to specific requirements. Also as described, retainment flaps can be provided as appropriate on - or in the region about - the upper edge region of the bottom part.

25

30

LIST OF REFERENCE NUMERALS

1. Package
2. Bottom part of package
- 5 3. Cover part of package
4. Front side of cover part
5. Hinge portion
6. Flange-like upper rim portion of bottom part
- 6' Flange-like upper rim portion of bottom part between egg pockets
- 10 7. Protrusions on cover part
8. Engagement surface of protrusion
9. Edge
10. Retainment opening in cover part
11. Retainment projection on bottom part
- 15 12. Pocket
13. Region between adjacent pockets
14. Opening
15. Underlying surface
16. Top surface
- 20 17. Rounded edge portion
18. Edge portion
19. Edge portion
20. Planar edge region
21. Distal edge portion of front side of cover part
- 25 22. Inclined portion on retainment projection
23. Edge portion of retainment opening
24. Side surface of bottom part opposite hinge portion
25. Retainment flaps

CLAIMS

1. Package (1) formed by suction moulding of a fibrous material for receiving one or more frangible products to be packed, such as eggs, comprising:

- 5 - a bottom part (2) comprising non-planar side surfaces so as to match at least partially the outer contours of the product(s) to be packed, an upper rim portion (6) of the bottom part (2) extending outwards from the bottom part (2);
- a cover part (3) comprising at least a top surface (16) and a front surface (4) which meet at an angle to form an edge (17, 18);
- 10 - the bottom part (2) being connected to the cover part (3) by a hinge (5) so as to allow the cover part (3) to move between an open position and a closed position;
- the front surface (4) extending down from the edge (17, 18) and overlapping the non-planar side surface of the bottom part (2) opposite the hinge (5) when the cover part (3) is in its closed position;

15 characterised in that

- said cover part (3) is provided with at least one inwardly extending protrusion (7) for locking engagement with said upper rim portion (6) of the bottom part (2) when the package (1) is being closed.

20 2. Package according to claim 1, characterised in that said agricultural products are eggs and that the bottom part (2) of the package (1) is provided with a pattern of pockets (12) for accommodating the eggs.

25 3. Package according to claim 1 or 2, characterised in that the package (1) is a moulded product.

4. Package according to claim 3, characterised in that the package (1) is moulded as one piece.

30 5. Package according to any of the preceding claims, characterised in that the package (1) is made of moulded pulp.

6. Package according to claim 1, characterised in that said hinge (5) is positioned above the level of the upper rim portion (6) of the bottom part (2).

7. Package according to claim 1, characterised in that said cover part (3) on the front side (4) hereof is provided with an edge portion (19) and that said one or more protrusions (7) is/are provided substantially adjacent said edge portion (19).

5 8. Package according to claim 2, characterised in that said locking engagement of the one or more protrusions (7) with said upper rim portion (6) of the bottom part (2) takes place at the flange-like upper rim portions (6') between adjacent pockets (12).

10 9. Package according to claim 1, characterised in that the package is furthermore provided with retainment means comprising one or more openings (10) in the front side (4) of the cover part (3) and co-operating retainment projections (11) on the side surface (24) of the bottom part (2) opposite the hinge (5).

15 10. Package according to claim 1 or 9, characterised in that the flange-like upper rim portion (6) of the bottom part (2) is furthermore provided with outwardly extending retainment flaps (25).

20 11. Package according to claim 10, characterised in that said flaps (25) are placed for engagement with the engagement surface (8) of the protrusions (7) on the cover part (3).

25 12. Package according to claim 10 when dependent on claim 9, characterised in that said flaps (15) are placed for engagement with an edge portion (23) of said openings (10) provided in the cover part (3).

13. Package (1) formed by suction moulding of a fibrous material for receiving one or more frangible products to be packed, such as eggs, comprising:

- a bottom part (2) comprising non-planar side surfaces so as to match at least partially the outer contours of the product(s) to be packed and provided with an upper rim portion (6);
- a cover part (3) comprising at least a top surface (16) and a front surface (4) which meet at an angle to form an edge (17, 18);
- the bottom part (2) being connected to the cover part (3) by a hinge (5) so as to allow the cover part (3) to move between an open position and a closed position;

- the front surface (4) extending down from the edge (17, 18) and overlapping the non-planar side surface of the bottom part (2) opposite the hinge (5) when the cover part (3) is in its closed position;

characterised in that

- 5 - said bottom part (2) adjacent said upper rim portion (6) is provided with at least one outwardly extending protrusion for locking engagement with co-operating means provided on the cover part (3).

10 14. Package according to claim 13, characterised in that said co-operating means on the cover part (3) is one or more openings in the front surface (4) of the cover part (3).

15

20

25

30

35 ABSTRACT

RETAINMENT MEANS FOR PACKAGE

5 The invention relates to packages of a fibrous material for receiving frangible products such as eggs, the packages being provided with a bottom part and a cover part hingedly connected to the bottom part and specifically to various retainment means for releasably retaining the cover part to the bottom part in a simple, yet reliable manner. According to the invention there is thus provided retainment means
10 on the cover part for engagement with appropriate parts of an upper flange-like rim portion of the bottom part, said means according to one embodiment consisting of protrusions provided on the inner surface of the front side of the cover part. When the cover part from an open position is swung to a closed position on the bottom part, one or more protrusions on the cover part are brought into engagement with
15 the lower surface of said upper rim portion of the bottom part, thereby releasably retaining the cover part to the bottom part. The alternative possibility, i.e. the provision of appropriate protrusions on the upper edge region of the bottom part for engagement for instance with suitably shaped openings in the cover part is also described.

20

(It is suggested that Figure 2B be shown with the Abstract).

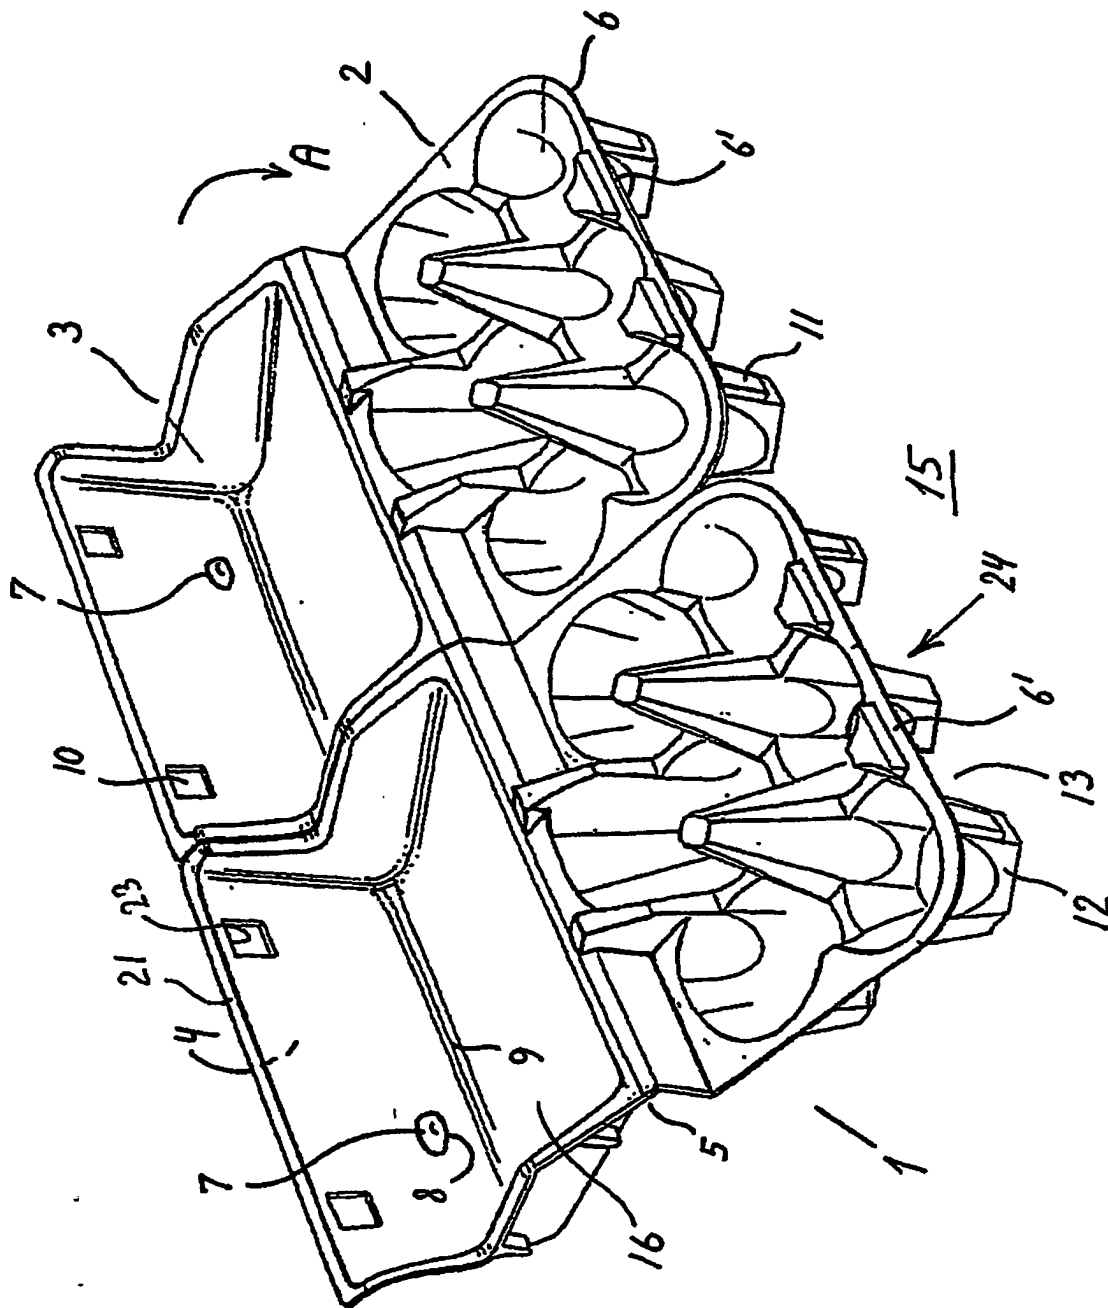


Fig. 1

PVS

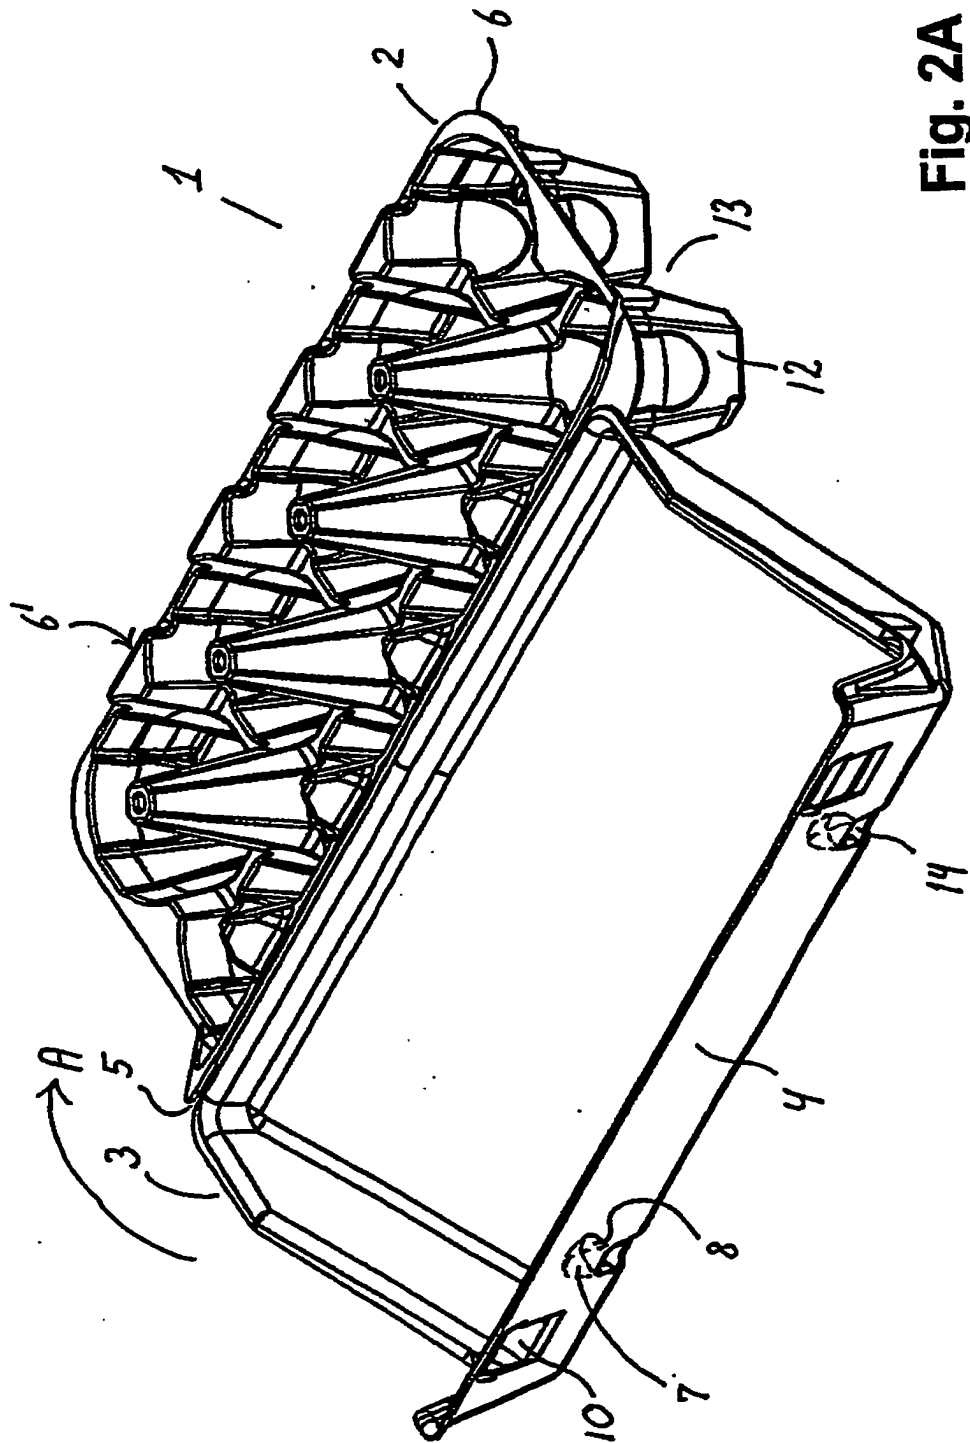


Fig. 2A

Modtaget
- 8 OKT. 2003

Fig. 2B

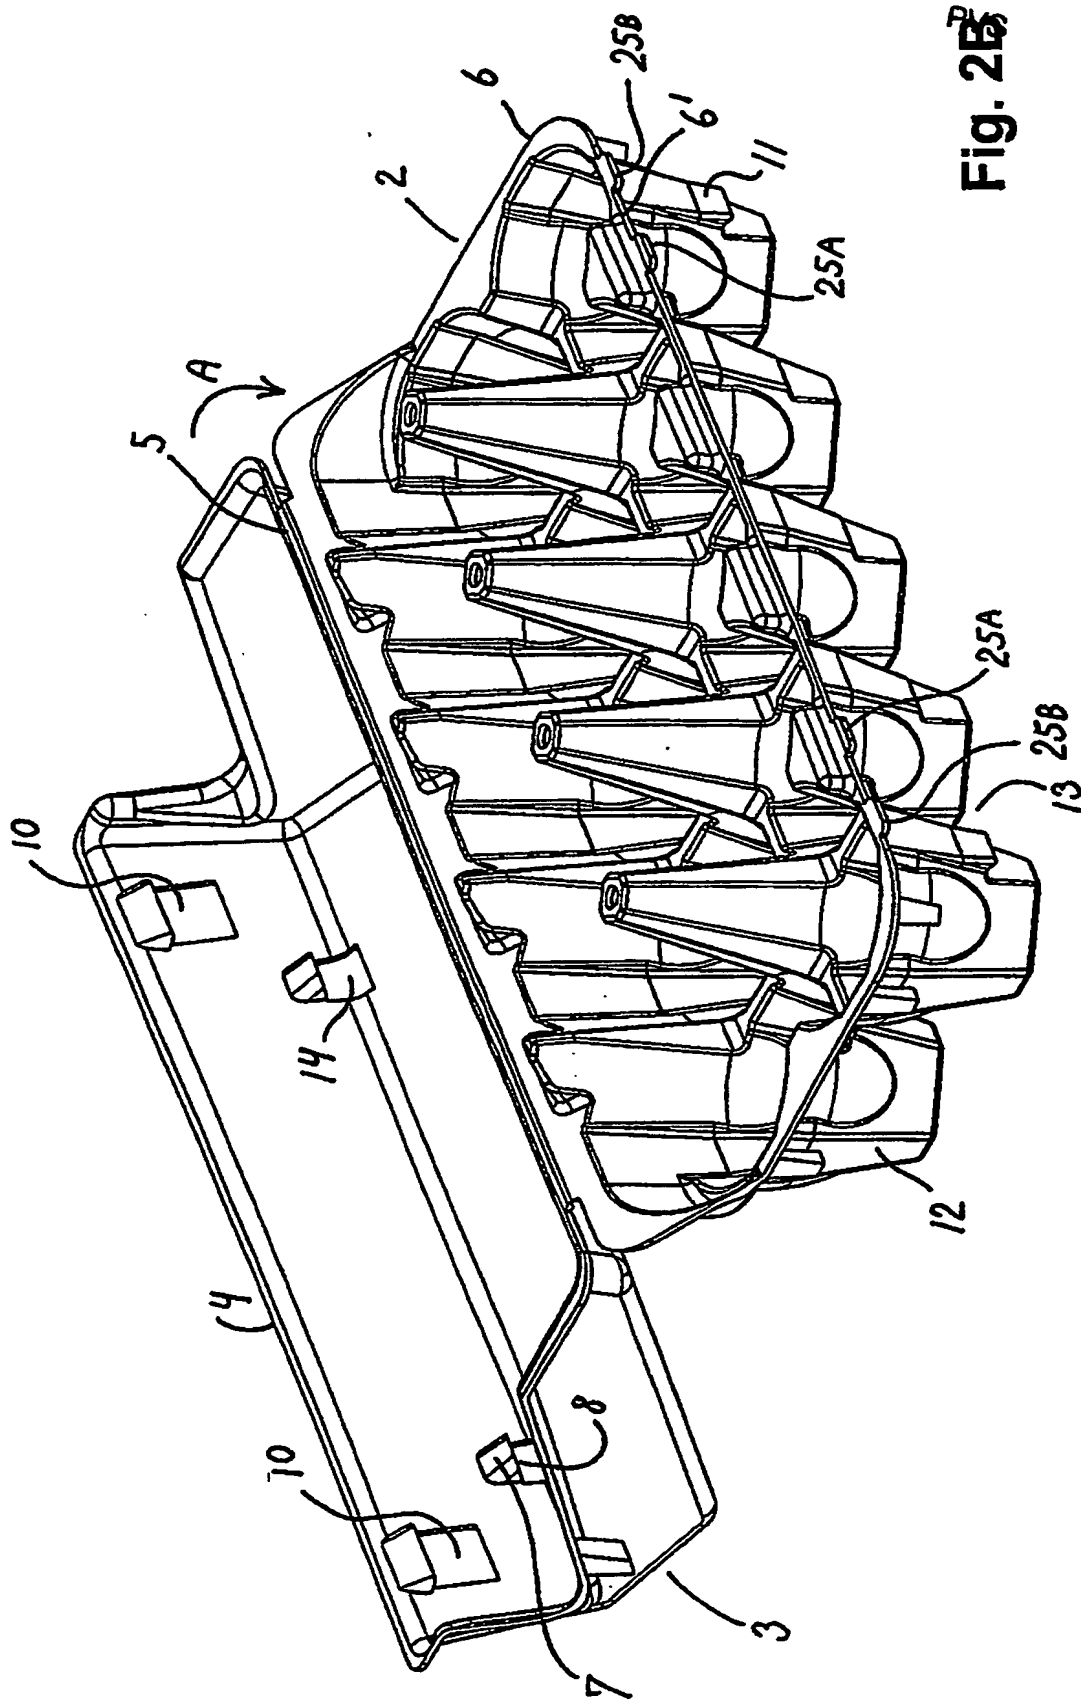
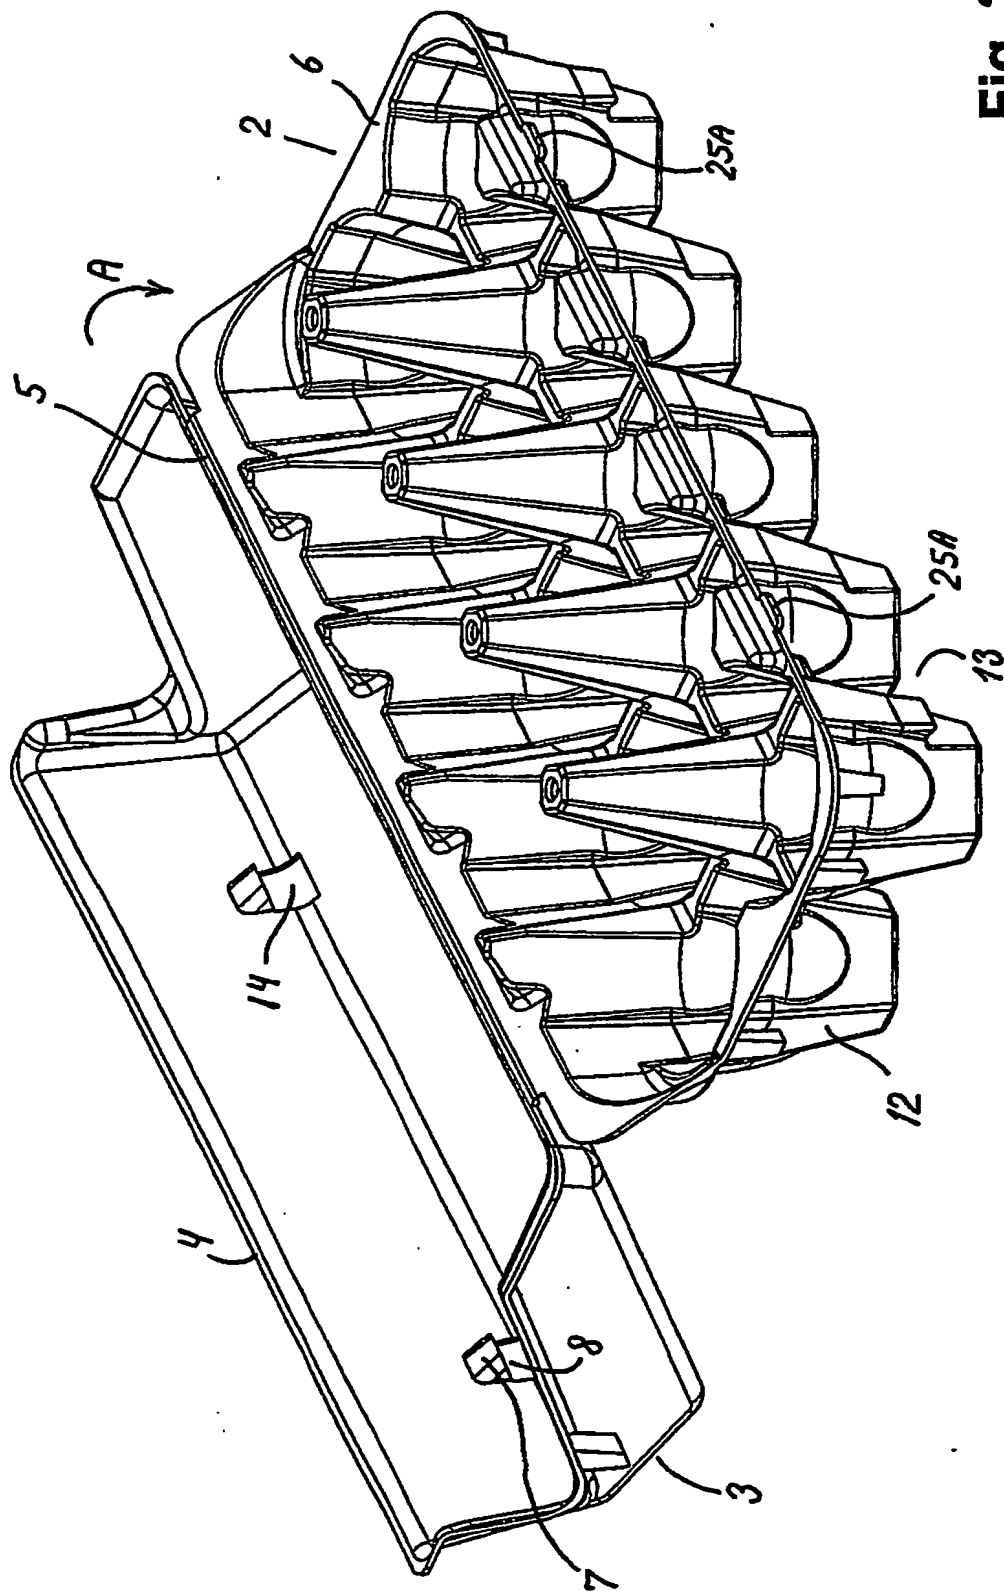


Fig. 2C



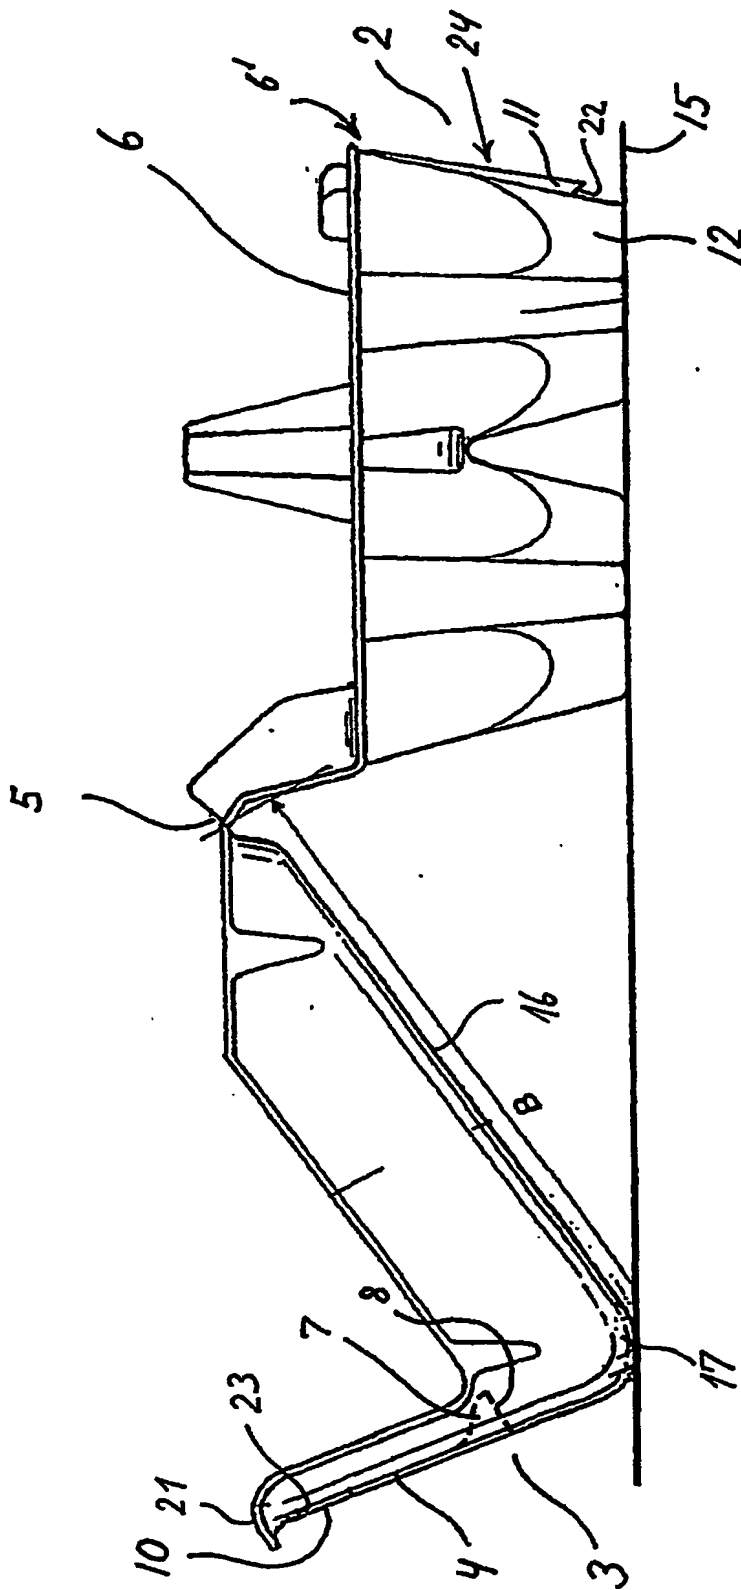


Fig. 3

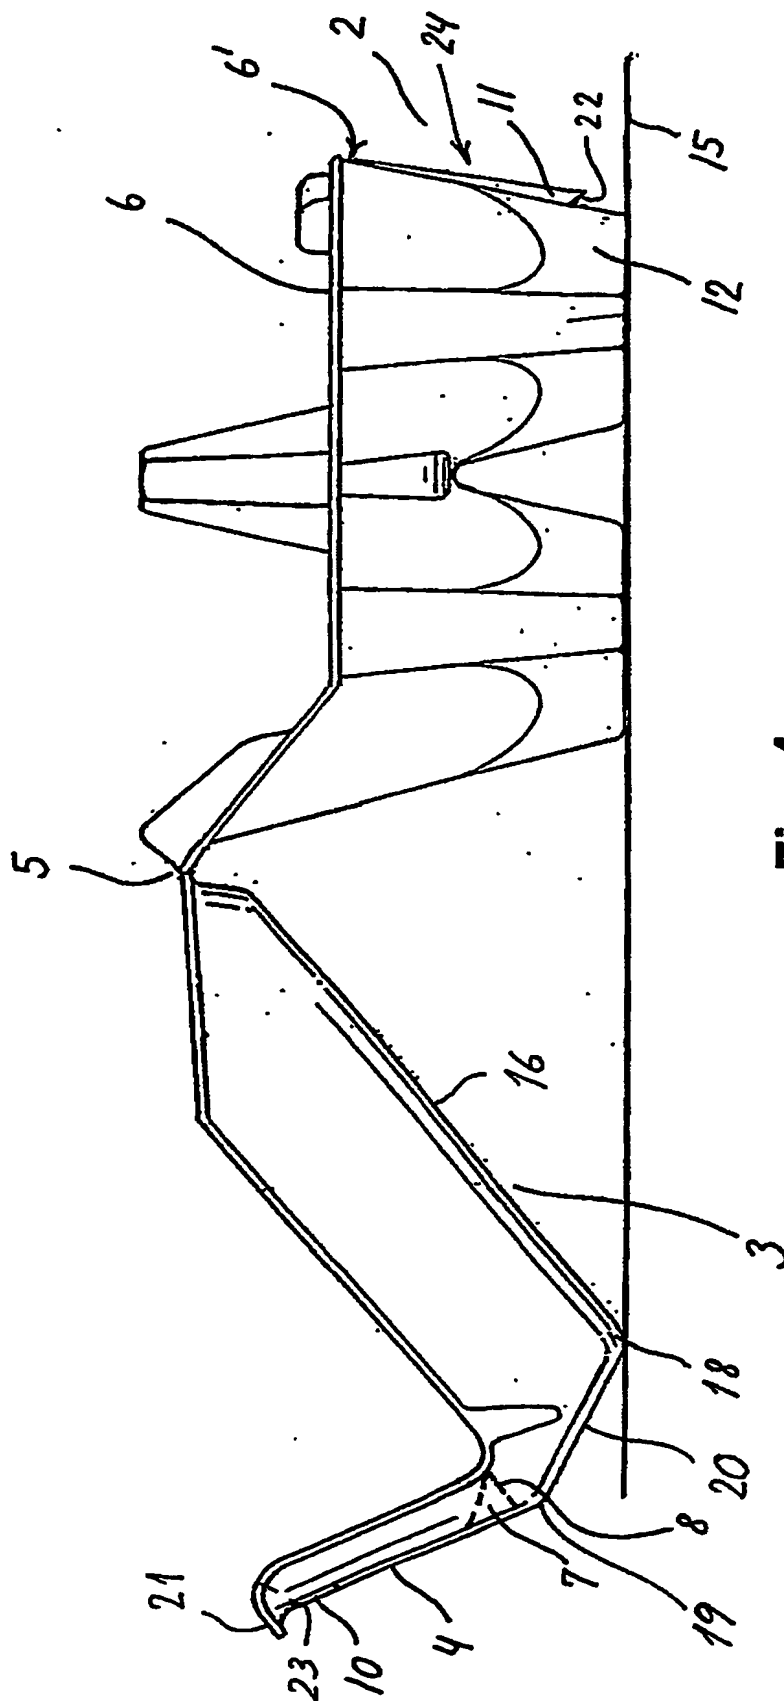


Fig. 4

Modtaget
- 8 OKT. 2003
PVS

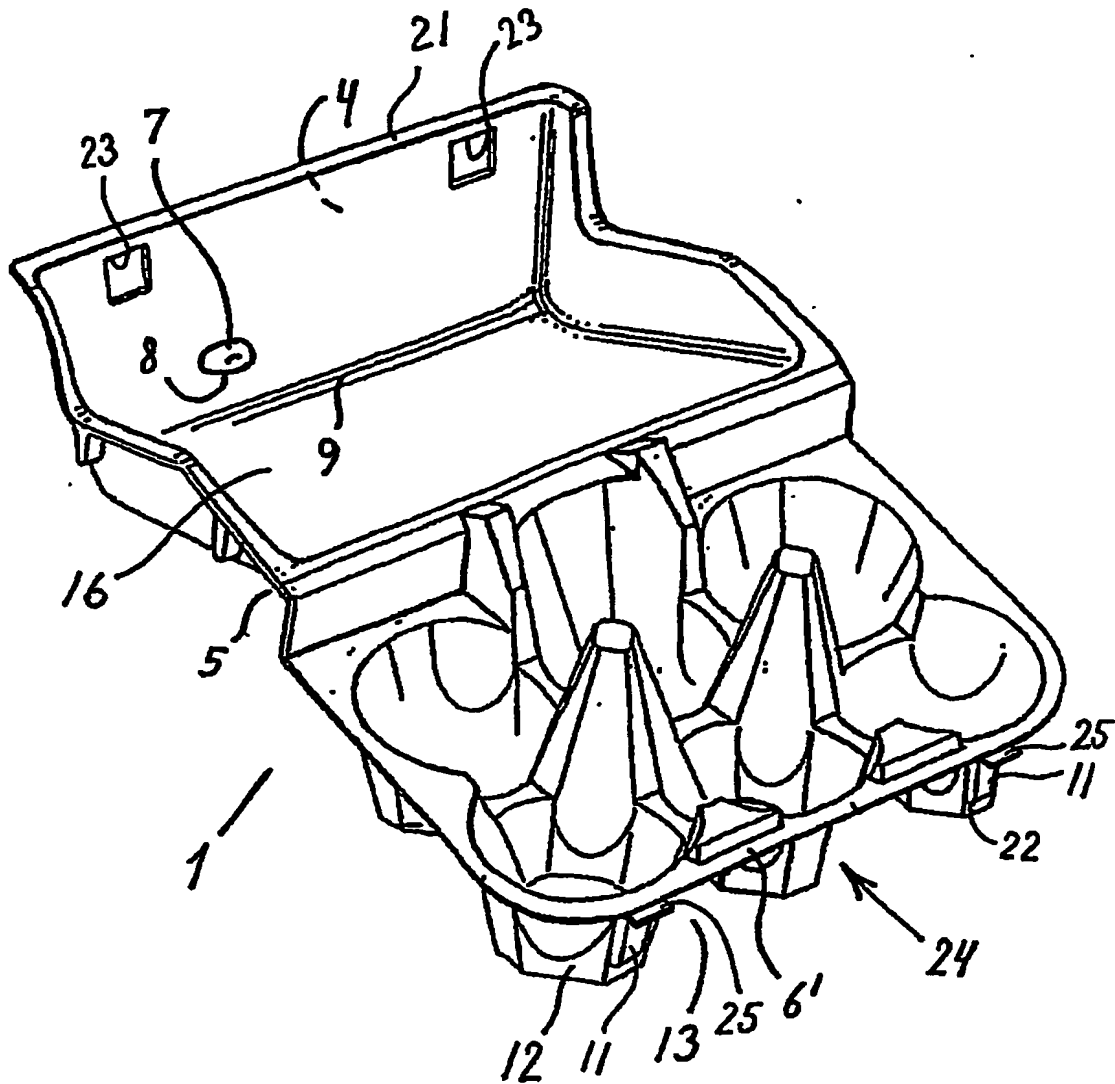


Fig. 5

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.